

# > Introduction

Roadway dispersion models, such as R-LINE (Snyder et. al. 2013), are used to estimate air quality and human health impacts at the street level in urban environments. Traditionally, meteorological measurements taken at airport stations are used as input data for modelling the dispersion of traffic-related pollutants within street canyons due to the lack of measurements within the city. However, depending on the airport location, uniformity of the urban landscape, and source location, this meteorology (e.g. wind speed and wind direction) may not be representative of the dynamics observed in the street canyons. Inaccurate meteorology can lead to uncertainties when modelling the dispersion of pollutants,

especially in complex urban environments such as street canyons. The use of mesoscale meteorological models to provide gridded meteorological values for each street can be seen as an alternative to the aforementioned methodology.

# > Methodology

# WRF vs. Single-Point Measurement

Traditionally, dispersion models such as R-LINE use single point meteorology, typically at an airport, to estimate dispersion from all sources in large domains. There are concerns with the applicability of single point meteorology especially where there exists highly-urbanized areas and sub-urban areas within the same domain.

WRF-ARW was run over Europe at a 12 km  $\times$  12 km horizontal resolution using NCEP initial/boundary conditions. Then WRF-ARW was run at 4 km  $\times$  4 km horizontal resolution over the Iberian Peninsula, with a nesting of over the European domain. Finally, WRF-ARW was executed at 1 km  $\times$  1 km over Catalonia domain using one-way nesting. In the vertical, WRF-ARW is configured with 38 sigma layers up to 50 hPa, where 11 correspond to the planetary boundary layer. In this study, WRF-ARW setup utilizes the rapid radiation transfer model for long-wave radiation and Dudhia for short-wave. It uses the Kain-Fritsch cumulus parameterization (Kain and Fritsch, 1990), the single-moment 3-class microphysics scheme, and the Yonsei University PBL scheme. Furthemore, the Noah land-surface model is applied, based on the CORINE land-use data from the year 2006.

In addition, WRF provides the possibility of forecasting localized meteorology, which is not possible with a single-point measurement. This will be advantageous when these localized meteorological adaptations are incorporated in the CALIOPE-Urban system.

# **R-LINE local meteorology**

We have identified two aspects of the urban topography that we believe greatly affect the dispersion of roadway emissions within the city. These two aspects are (1) the wind speed profile when the wind is profiled below the average building height in areas where buildings are separated by streets that are narrow compared to the building height; and (2) the wind direction within the city is greatly affected by the orientation of the buildings and the streets between them.

We believe that the wind profile within the city does not accurately capture the wind speed below the building height due to the increased surface roughness from the existence of the buildings. We have developed a methodology to increase the surface roughness based on the average building height, building density, and the building height to street width ratio. The theory here is that the surface roughness should increase with an increase in average building height, building density, and building height to street width ratio. Once the surface roughness ( $z_0$ ) is adjusted the displacement height, turbulent velocity ( $u^*$ ), convective velocity ( $w^*$ ), mixing height  $(z_i)$ , and Monin-Obukov length (L) are re-calculated (Cimorelli et al 2005). The increase in surface roughness generally leads to a larger displacement height,  $u^*$ ,  $w^*$ , and  $z_i$ . Therefore, the Monin-Obukov length is less stable and more convective atmospheric conditions. Ultimately, these adjustments have an effect on the way the winds are profiled and the rate of dispersion of the roadway emissions within the urban area.

In addition to the surface roughness adjustment, we adjust the wind speed (*U*) and direction to more closely represent the winds blowing down the street and constrained by the buildings. This leads to local wind being "channeled" down the street canyons. We have adapted R-LINE to incorporate the orientation of roadways with respect to the wind direction based on Soulhac et al. (2008). We have adapted the wind direction to mostly (90%) follow the street direction, with the remaining wind in the perpendicular direction. This leads to a recalculation of the wind direction and speed before roadway emissions are dispersed within a city.

ADAPTATION OF METEOROLOGY AND R-LINE TO STREET CANYON MICRO-CLIMATES: APPLICATION IN BARCELONA CITY SPAIN Michelle Snyder Institute for the Environment, The University of North Carolina, Chapel Hill, NC, USA Jaime Benavides, Marc Guevara, Carlos Pérez García-Pando, Albert Soret and Oriol Jorba Earth Sciences Department, Barcelona Supercomputing Center, BSC-CNS, Barcelona, Spain Fulvio Amato and Xavier Querol Institute of Environmental Assessment and Water Research, IDAEA-CSIC, Barcelona, Spain

### > Observations

In this study observations from an experimental campaign conducted in April 2013 in Barcelona (Amato et al., 2014) are used to evaluate estimated wind conditions. During the campaign, mobile laboratories placed at the parking lane of several street segments measured air quality parameters at 3 meters (m) height and meteorological parameters at 5.5 m. For this study, data gathered every 30 minutes at Industria Road No. 213, Industria Road No. 309 and Valencia Road No. 445 are used. These street present a marked canyon pattern where building height to street width ratio is approximately 1.

### > Results

Figure 1 compares the single-point airport measurement and the WRF grid cell that approximates the meteorology in the grid-cell containing the airport. We can see from Figure 1 that the WRF gridded meteorology is performing well to approximate the airport measured meteorology. There is a slight bias in the WRF wind speed, but this on average is less than 10%.

Next in Figure 2, we compare the diurnal pattern of WRF wind speeds at the airport with those at a location within the city. The highest wind speeds occurs in the middle of the day and the lowest wind speeds occur in the morning in hours eight and nine. However, we see that WRF predicts a lower wind speed at the location inside the city for all hours.

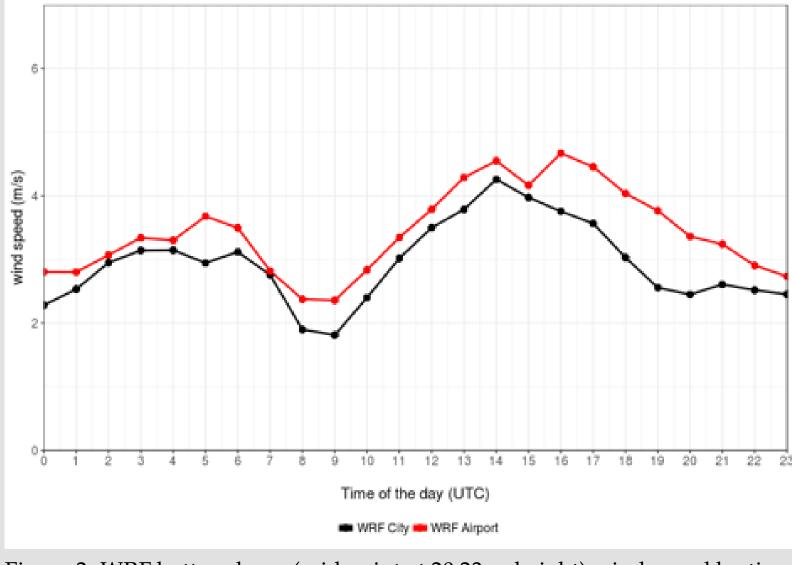


Figure 2: WRF bottom layer (mid point at 20.23 m height) wind speed by tim of the day at airport (RED) and at Carrer Industria 309 (BLACK) in the city.

As Figure 3 shows, the R-LINE local adjustments more closely matches the observed wind speed. However, this shows there is still room for improvement to better match the measured wind speeds.

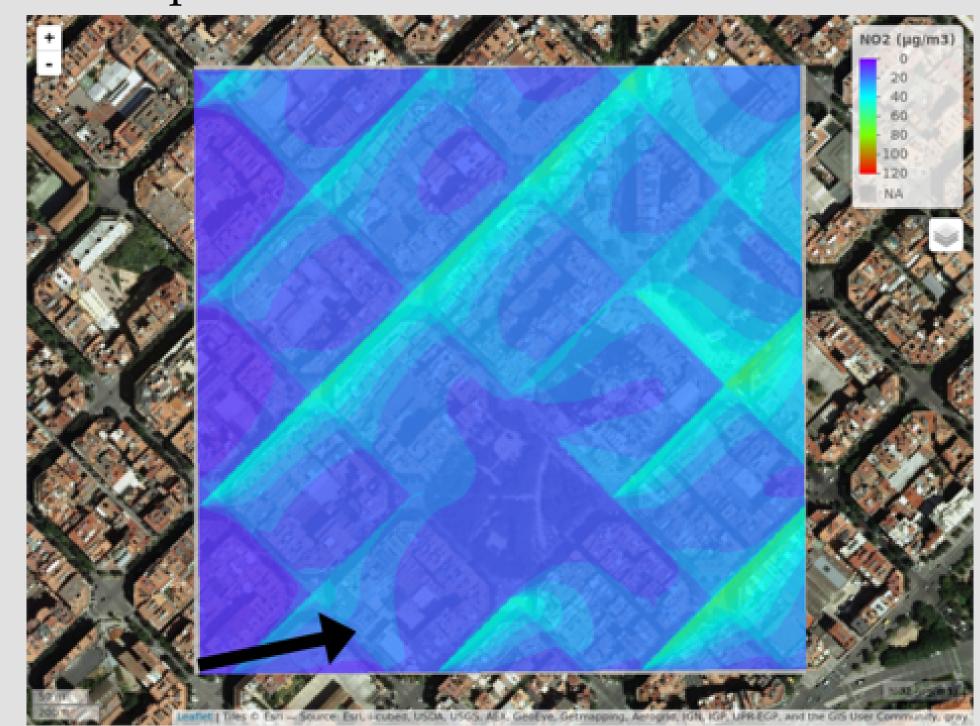

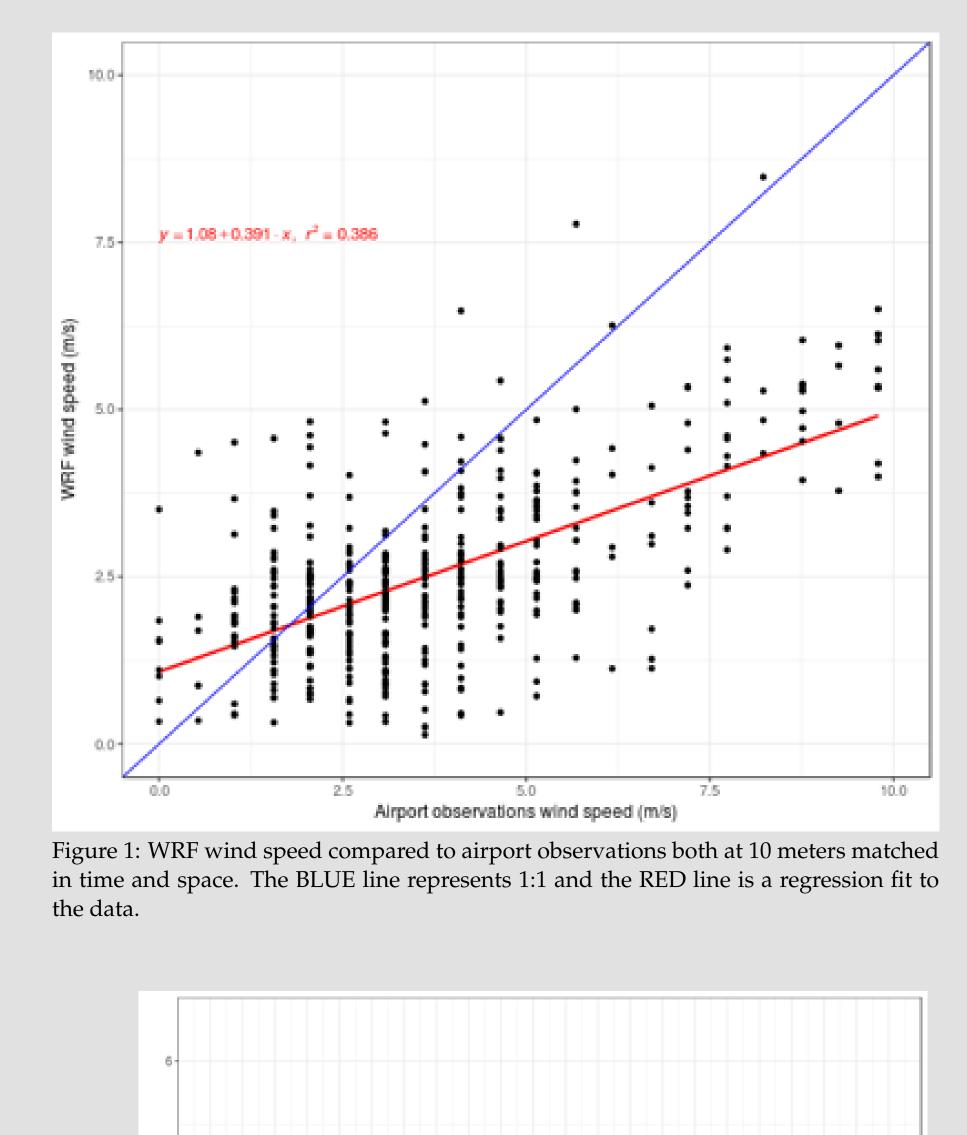
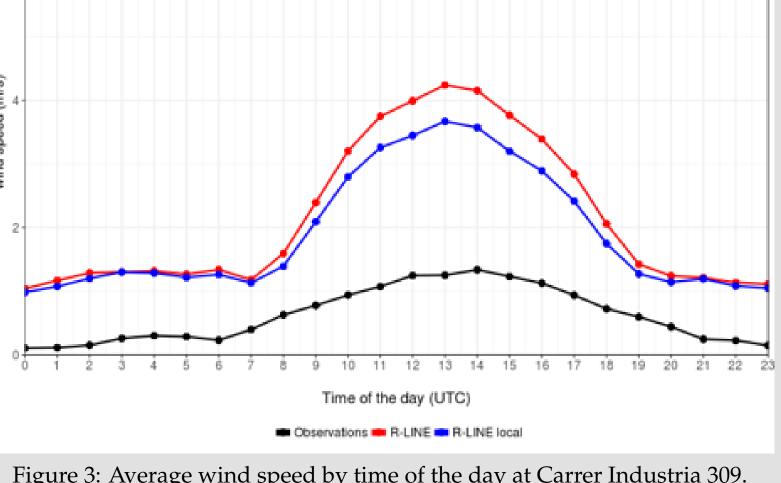



Figure 4: R-LINE before local meteorology adjustments: NO2 concentrations in Sagrada Familia area at 8 am (UTC) on 9th April 2013. Wind direction is shown by the BLACK arrow at the bottom left corner of the spatial modeling domain.

Next, we show effects of the wind direction and speed adjustments to show the influence of buildings to "channel" the winds along the streets within and urban area. We select the 8am hour of April 9, 2013, which has a  $u^*=0.5 \text{ m/s}$ ,  $w^*=1.1 \text{ m/s}$ ,  $z_i=430.5 \text{ m}$ , L = -108.4 m,  $z_0 = 1.0 \text{ m/s}$ m, and U = 1.5 m/s. Figure 4 shows spatially how R-LINE estimates the dispersion of  $NO_2$ within the urban area before accounting for the influence of the buildings.









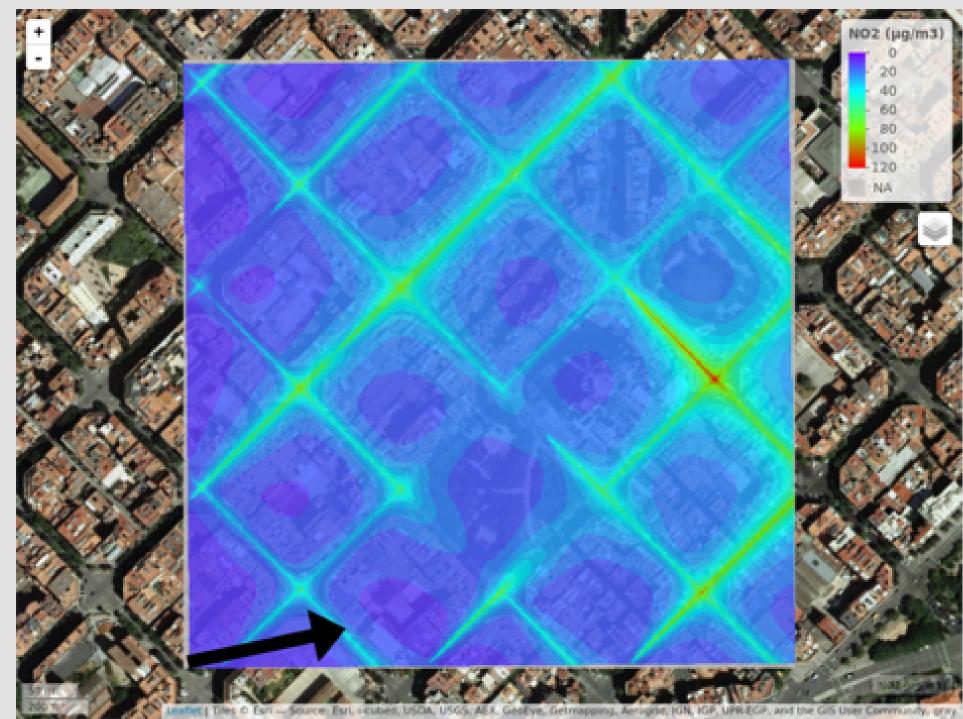


Figure 5: R-LINE local meteorology: NO2 concentrations in Sagrada Familia area at 8 am (UTC) on 9th April 2013. Wind direction is shown by the BLACK arrow at the bottom left corner of the spatial modeling domain.

# > Results (con't)

Once we take into account the effect of the buildings to channel the meteorology and increase the surface roughness the surface meteorological parameters are recalculated. These recalculated parameters are  $u^*=0.6 \text{ m/s}$ ,  $w^*=1.5 \text{ m/s}$ ,  $z_i=1005.2 \text{ m}$ , L = -717.8 m,  $z_0 = 1.2 \text{ m}$ , and U = 1.2 m2.8 m/s. The spatial concentration field is shown in Figure 5. Comparison of Figures 4 and 5 shows increased concentrations within the street canyons created by the buildings. This also shows that the dispersion from the roadways is more contained within the street canyon where the emissions occur. We believe this better represents the "channeling" effect that the buildings have on the dispersion of the roadway emissions within the street canyons in the urban area.

# > Conclusions

- ban area.
- tions within the city.

# > References

Cimorelli, A.J., Perry, S.G., Venkatram, A., Weil, J.C., Paine, R.J., Wilson, R.B., Lee, R.F., Peters, W.D. and Brode, R.W., 2005. AERMOD: A dispersion model for industrial source applications. Part I: General model formulation and boundary layer characterization. Journal of applied meteorology, 44(5), pp.682-693.

Snyder, M.G., Venkatram, A., Heist, D.K., Perry, S.G., Petersen, W.B. and Isakov, V., 2013. RLINE: A line source dispersion model for near-surface releases. Atmospheric environment, 77, pp.748-756.

Soulhac, L., Perkins, R.J. and Salizzoni, P., 2008. Flow in a street canyon for any external wind direction. Boundary-Layer Meteorology, 126(3), pp.365-388.

# > Acknowledgements

BSC researchers acknowledge the grants CGL2013-46736-R, CGL2016-75725-R and COMRDI15-1-0011-04 of the Spanish Government. Jaime Benavides PhD work is funded with a grant from the FPI Programme by the Spanish Ministry of the Economy and Competitiveness, call 2014, with reference EEBB-I-17-12296.

This methodology is implemented as part of the CALIOPE-URBAN project. Additional results will be presented in CALIOPE-URBAN: COUPLING R-LINE WITH CMAQ FOR URBAN AIR QUALITY FORECASTS OVER BARCELONA by Jaime Benavides at 9:10am on Wednesday 10/25/2017.



Air quality within urban areas is difficult to represent due to the have complex atmospheric dynamics caused by the local topography. We have coupled a grid-based meteorological model with a roadway dispersion model with local meteorological adjustments to better represent these complex atmospheric dynamics and lead to improved modeling of air quality in an ur-

We began by comparing a grid-based meteorological model, WRF, to the meteorological parameters measured at an airport. Next, we showed the difference between the wind speed predicted at the airport and within the city. This shows the representativeness and power of using WRF-based meteorology as a starting point for the localized meteorology within the city. Next, we demonstrated the improved wind speed in R-LINE when incorporating the adjustments for increased surface roughness and the corresponding profiled wind speed at the measurement height. This step shows a better representation of the micro-meteorological condi-

We take a final step to adjust the wind direction based on the street and building orientation. This adjustment shows increased impact of roadway emissions within the street canyons and a decrease in influence of one street canyon on another.

We believe in totality that the use of WRF meteorology, the increased surface roughness, and the "channeling" of the wind adjustments provide a more representative picture of the complex dynamics occurring within the urban street canyon microclimate and will lead to increased model performance when predicting localized urban air quality.